

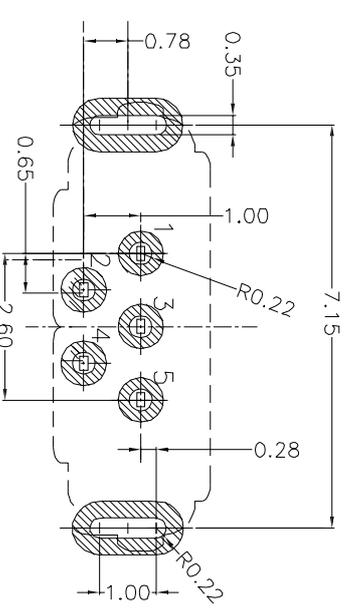
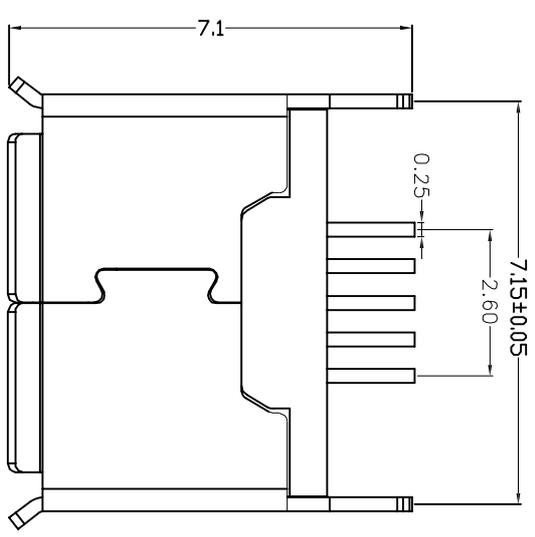
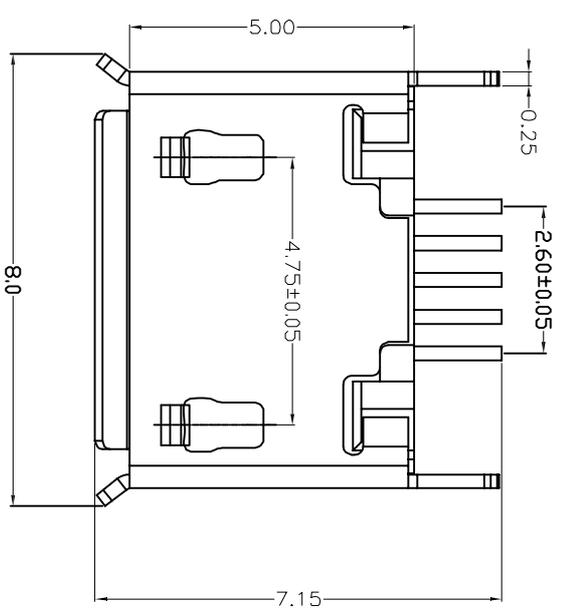


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	REVISE NOTE	JACK	4/9-09'

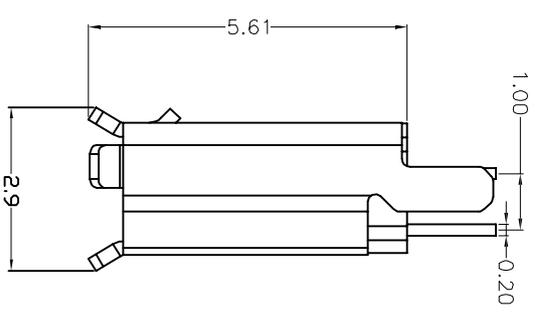

RECOMMENDED P.C.B LAYOUT

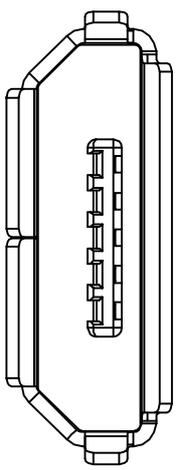

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 30V
3. Contact resistance: 30 M Max.
4. Insulation resistance: 100M Min.
5. Total mating force: 3.57 Kgf Max.
6. Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min.
7. Temperature range: -30°C~80°C

C	SHELL	1	SUS	TIN
B	CONTACT	5	CS191	1U" Au
A	HOUSING DESCRIPTION	1	LCP UL94V-0	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
东莞市优连电子有限公司				
TITLE		Micro USB SP/F B TYPE 180插板		
DWM	JACK	PART NO.	2UB2006-B00180	
CHKD	SCALE:	UNIT:	mm	
APVD	SIZE: A3	SHEET:	10F 1	REV:A

CUSTOMER COPY