





# 1.27mm Pin Header, Dual Row, Straight/Right Angle

## SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40°C to +105°C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V

PART NO: 2PH-1680-D□□

表示PIN脚排2-50

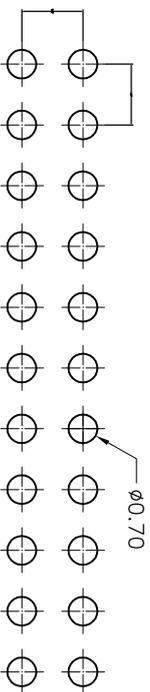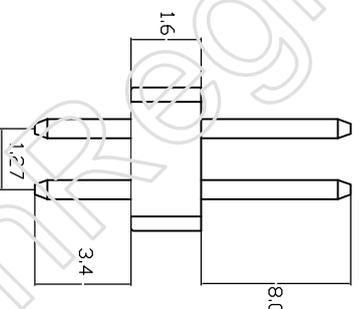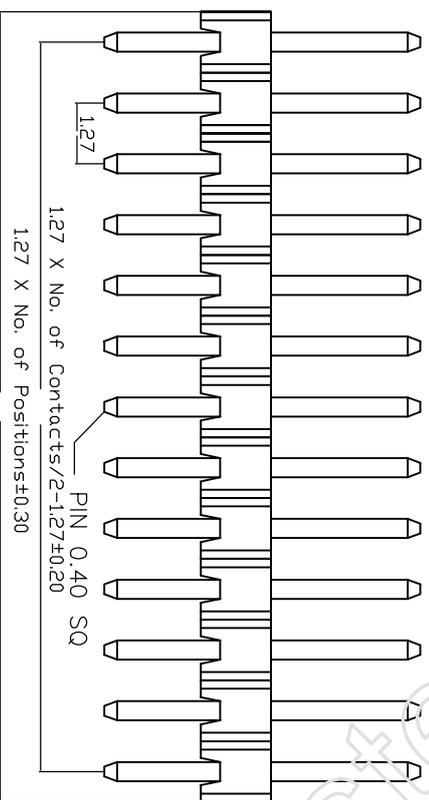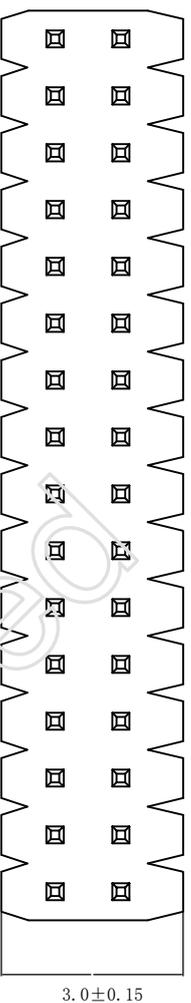

PCB LAYOUT

REV/ECN NO OR DESCRIPTION	REVISED	DATE

B CONTACT	4-100	BRASS	Au or Sn Over 50u" Ni
A HOUSING	1	Polyester(ULE 94V-0) Standard Nylon-6T	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	3G ENTERPRISE LIMITED	
X : ±0.35		TITLE	PH1.27*1.6 XX# L=13.0/3.4 S/T
.X : ±0.25		DWN	JACK
.XX : ±0.20		CHKD	SCALE: UNIT: mm
.XXX : ±0.15		APVD	SIZE: A3 SHEET: 10F 1 REV: A
CUSTOMER COPY			

1 2 3 4 5 6 7 8

90-06-035-1A