

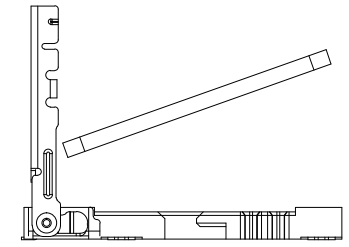
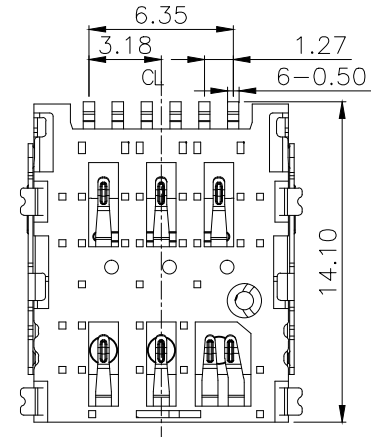
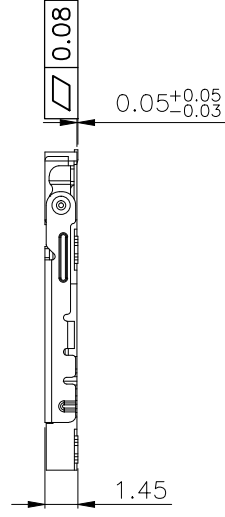



REV.	ECN.NO.	MODIFY.CONTENT	DATE

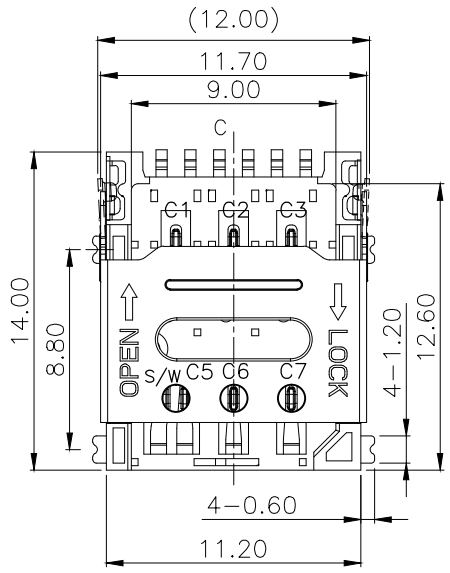



STEP 1 INSERT NANO SIM CARD



STEP 2 PUSH THE SHELL





STEP 3 FINISH

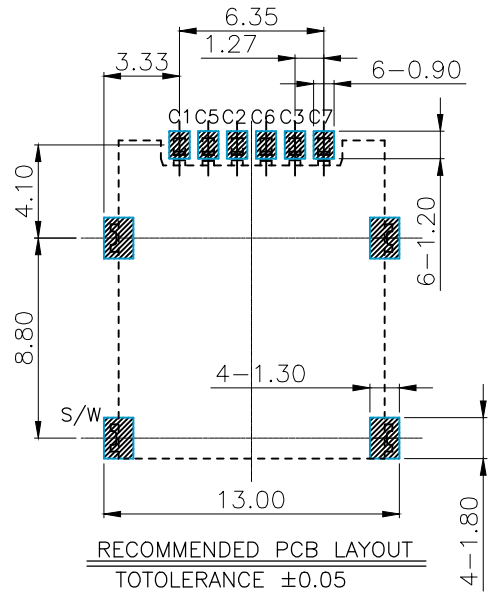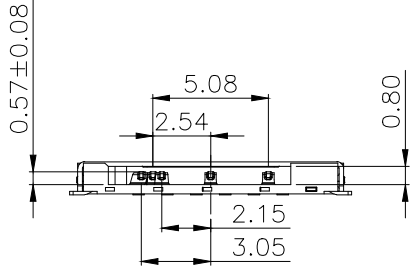


RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05
SMT SOLDER AREA

NOTES:

- 1) 材质:
主体: LCP S475 UL 94V-0
端子: C5210-EH, T=0.15
壳子: SUS201-3/4H, T=0.20
- 2) 电镀:
端子: 整体镀镍底 30u"-50u", 触点刷金 1u", 焊脚刷金 1u"
外壳: 整体表面洗油即可。





PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

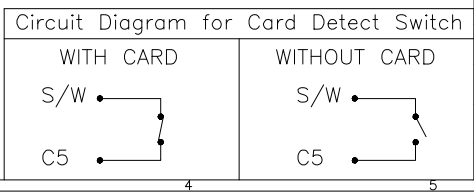

GENERAL TOLERANCE		图号	JYSA20170520	设计		比例	1:1
X.±0.35	x.*±5°	品名	NANO SIM CARD 7PIN 1.5H 掀盖式	审核		单位	mm
.X±0.30	.x'±2°			核准		视角	⊙
.XX±0.25	.xx'±1°	料号	JYS-SIM150-156	日期	2017/05/20	版本	AO
.XXX±0.15	.xxx'±0.5°	Shenzhen JYSCONN Electronics Co., LTD.					
页号	1/2						

REV.	ECN.NO.	MODIFY.CONTENT	DATE

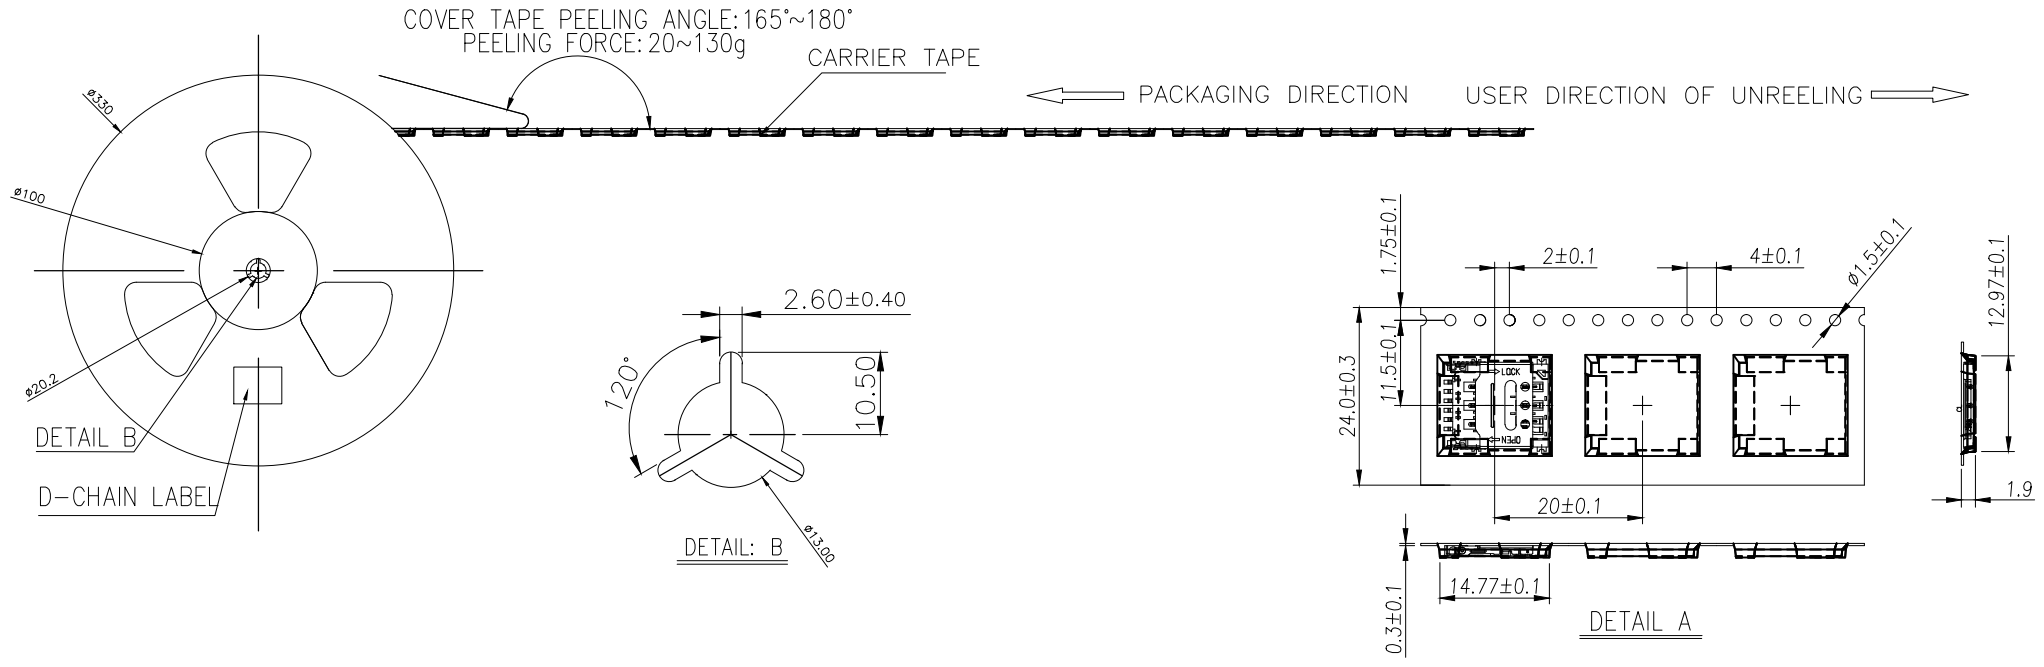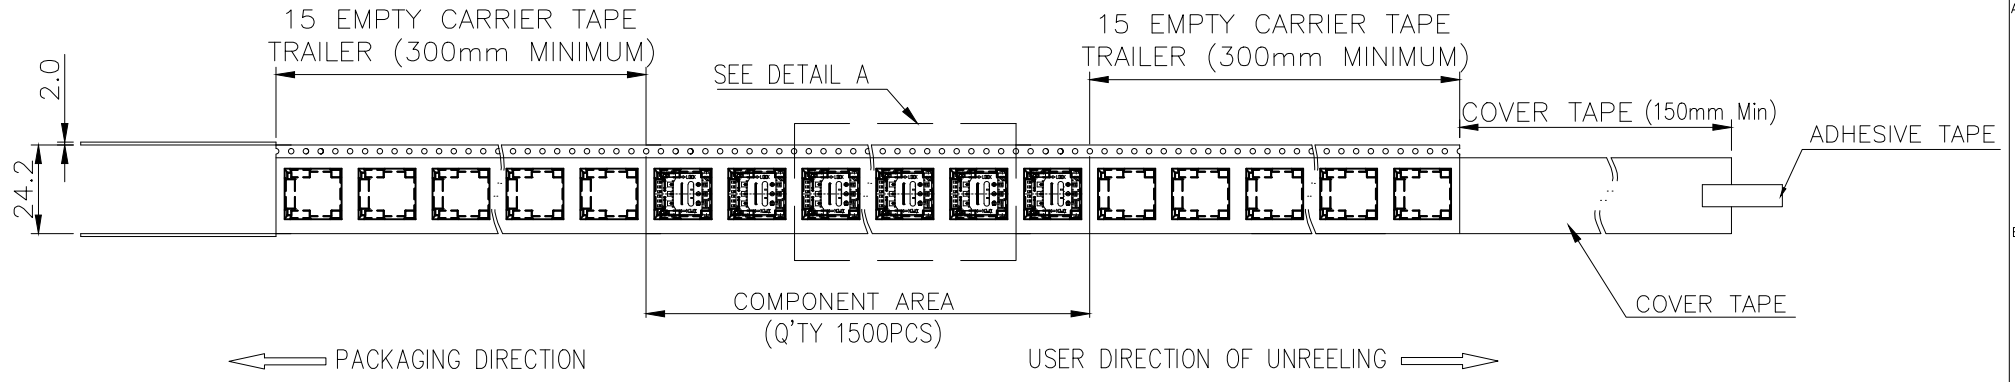

GENERAL TOLERANCE		图号	JYSA20170520	设计		比例	1:1
X.±0.35	x.°±5'	品名	1.5H NANO SIM CARD HINGE TYPE包装图	审核		单位	mm
.X±0.30	.x'±2'			核准		视角	
.XX±0.25	.xx'±1'	料号	JYS-SIM150-156	日期	2017/05/20	版本	AO
.XXX±0.15	.xxx'±0.5'	Shenzhen JYCONN Electronics Co., LTD.					
页号	2/2						

1	1500	11	XX	16500	350X350X350	
ITEM	PRODUCT No.	Q'TY/REEL	REEL/CARTON	Kg/CARTON	Q'TY/CARTON	CARTON SIZE