
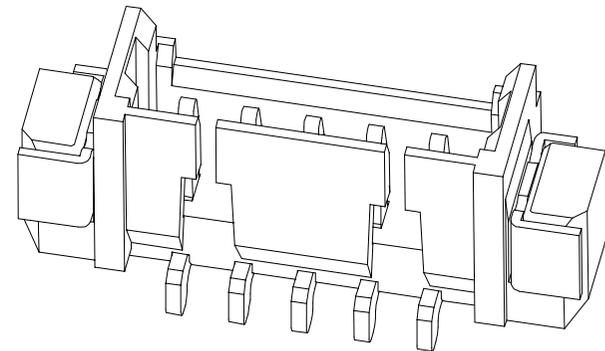
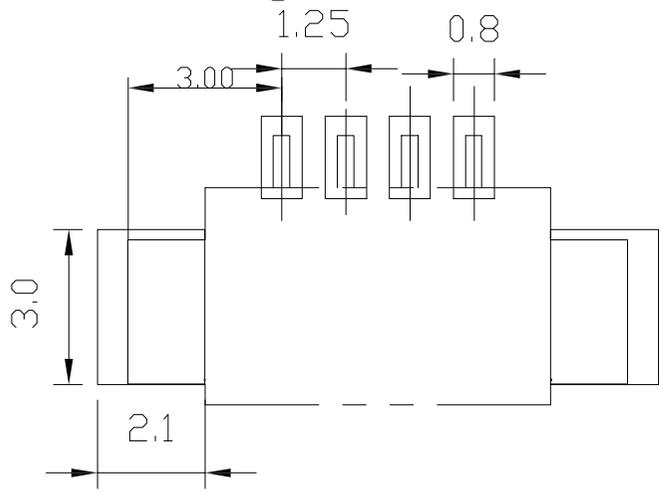
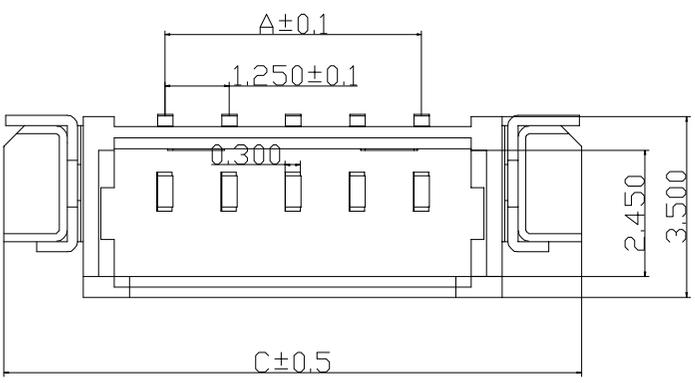
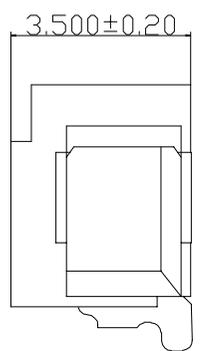


REV.	ECN.NO.	MODIFY.CONTENT	DATE
AO		NEW	2017/10/18

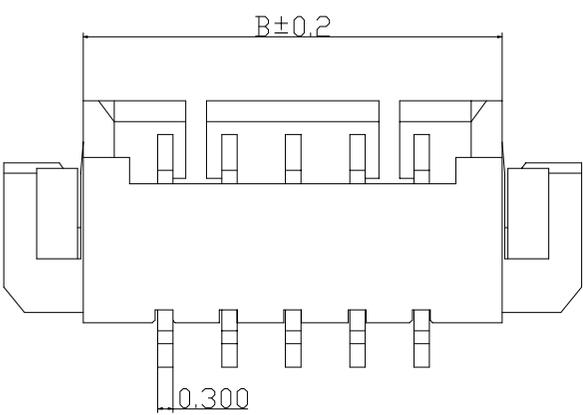

Specifications / 技术规格

Current rating: 0.5A
 额定电流: 0.5A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 100 MΩ Min.
 绝缘电阻: 最小100MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20MΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25° C到85° C

Materials / 材料:
 Contact Material: Bronze(Sn plating)
 接触铜针材料: 磷铜 (镀锡)
 Soldering Terminal: Bronze(Sn plating)
 焊片材料: 磷铜 (镀锡)
 Insulation Material: LCP UL94V-0
 绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 (mm)		
		A	B	C
2	JYS-WFW1.25-002	1.25	4.30	7.00
3	JYS-WFW1.25-003	2.50	5.55	8.25
4	JYS-WFW1.25-004	3.75	6.80	9.50
5	JYS-WFW1.25-005	5.00	8.05	11.30
...
16	JYS-WFW1.25-016	18.75	21.80	24.50

GENERAL TOLERANCE		DWG NO.	JYSA20171018	APPD:	WIND	Scale	1:1
X.±0.45	x.*±5°	Title	WAFER 1.25PH 卧贴	CHKD:		UNIT	mm
.X±0.35	.x.*±2°			DR:			
.XX±0.25	.xx.*±1°	Part NO.		Date	2017/10/18		
.XXX±0.15	.xxx.*±0.5°			JYSCONN Shenzhen JYSCONN Electronics Co., LTD.			
SHEET	1/1						