
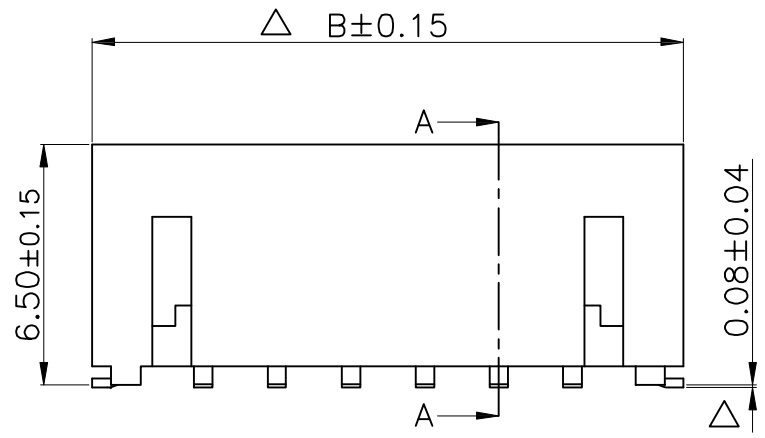
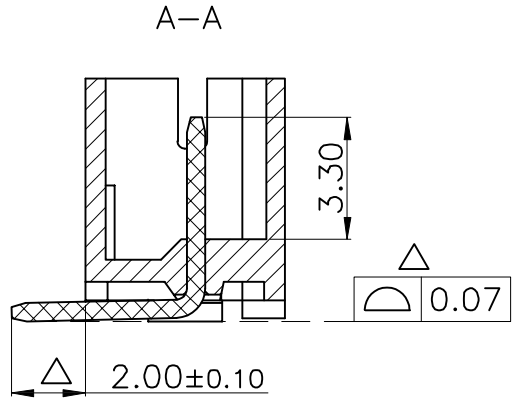


REV.	ECH.NO.	MODIFY.CONTENT	DATE
AO		NEW	2017/10/18

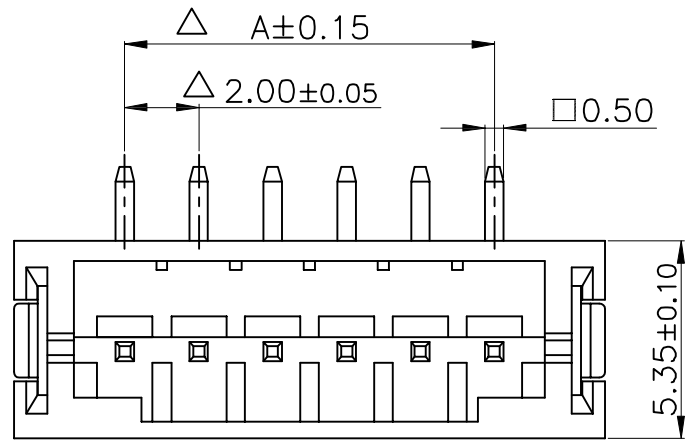

★插针焊片焊接面高出塑件尺寸

孔数	型号	尺寸 (mm)	
		A	B
2	JYS-WFL200-002	2.0	8.0
3	JYS-WFL200-003	4.0	10.0
4	JYS-WFL200-004	6.0	12.0
5	JYS-WFL200-005	8.0	14.0
...
16	JYS-WFL200-016	30.0	36.0

Specifications / 技术规格

Current rating: 0.5A
 额定电流: 0.5A
 Voltage rating: 50V AC,DC
 额定电压: 50V AC,DC
 Insulation Resistance: 100 MΩ Min.
 绝缘电阻: 最小100MΩ
 Dielectric Withstanding: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20MΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C到85°C

Materials / 材料:

Contact Material: Bronze(Sn plating)
 接触铜针材料: 磷铜 (镀锡)
 Soldering Terminal: Bronze(Sn plating)
 焊片材料: 磷铜 (镀锡)
 Insulation Material: LCP UL94V-0
 绝缘体材料: LCP UL94 V-0

GENERAL TOLERANCE		DWG NO.	JYSA20171018	APPD:	WIND	Scale	1:1
X.±0.45	x.*±5°	Title	WAFER 2. OPH 立贴	CHKD:		UNIT	mm
.X±0.35	.x.*±2°			DR:		Date	2017/10/18
.XX±0.25	.xx.*±1°	Part NO.					
.XXX±0.15	.xxx.*±0.5°						
SHEET	1/1						