

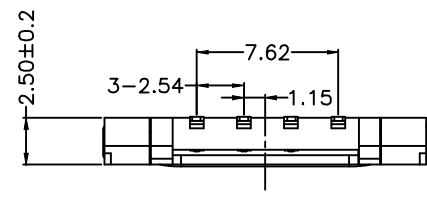
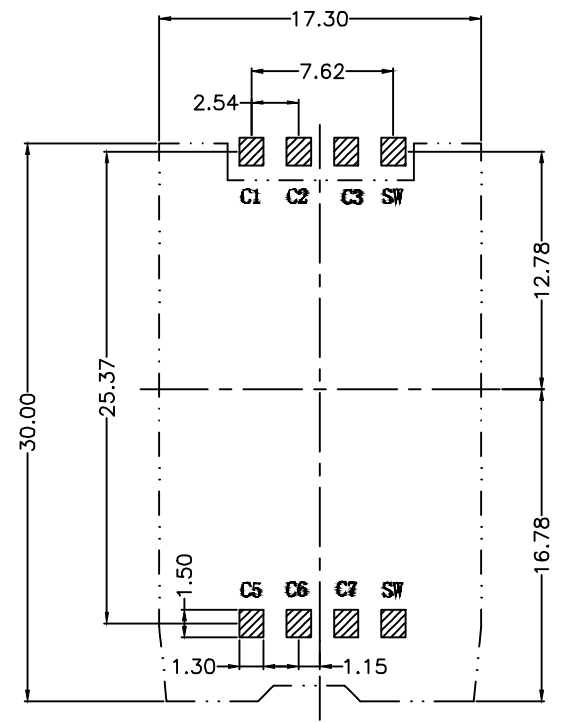



REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2020/10/31

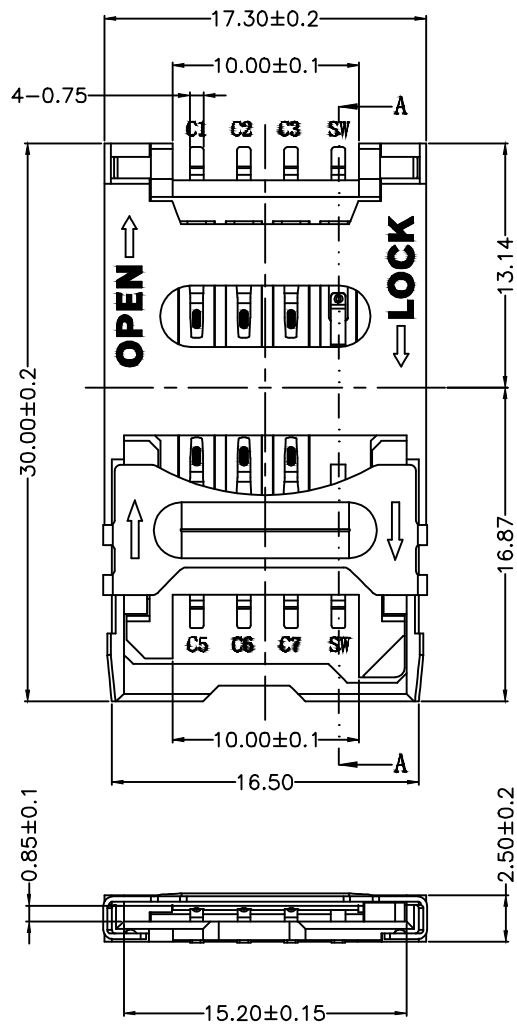

RECOMMENDED P. C. B LAYOUT
COMPONENT SIDE (TOLERANCE ±0.05)

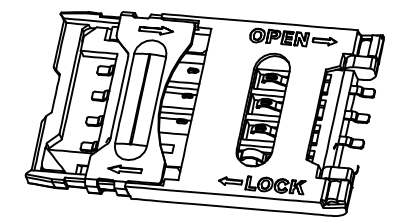

SECTION A-A

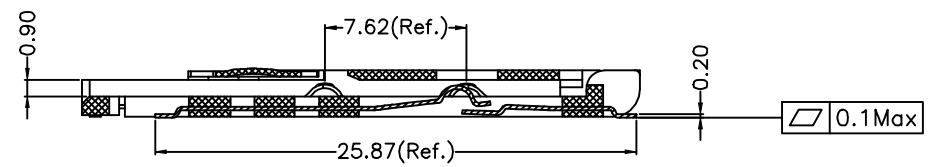

Specification 规格:

Material 物料规格:
Housing 塑胶主体: LCP UL94V-0
Contact Terminal 接触端子: Phosphor Bronze
Metallic Shell 金属外壳: Stainless Steel-SUS304

Plating 电镀规格:
Contact Terminal Plating 接触端子部分电镀
Contact Area: 5μ" Gold
Soldering Area: 100μ" Tin
Under-plating: 50μ" Nickel above

Electrical 电气规格:
Voltage Rating 电压额定值: 50 V max
Current Rating 电流额定值: 1A max
Operating Temperature 工作温度: -40°C to +85°C
Contact Resistance 接触电阻值: 50 mΩ typical, 100mΩ max
Insulating Resistance 绝缘电阻值: 1000 MΩ min. (Apply 施加 500V DC)
Dielectric Withstanding Voltage 耐电压: 500 VAC for 1 minute

Mechanical 机械性规格:
Durability 耐久性: min 5,000 cycles

GENERAL TOLERANCE		DWG NO.	JYSA0525-002	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	掀盖式 SIM CARD 6+2P 2.5H	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	JYS-SIM250-206	Date	2020/10/31		
.XXX±0.15	.xxx'±0.5'						
SHEET	1/1			JYSCONN Electronics Co., LTD.			