
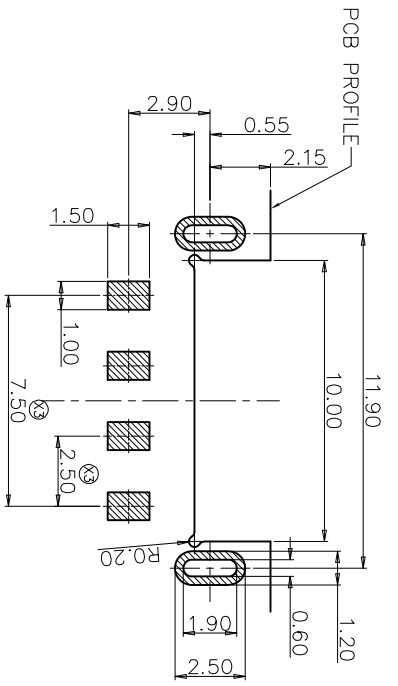
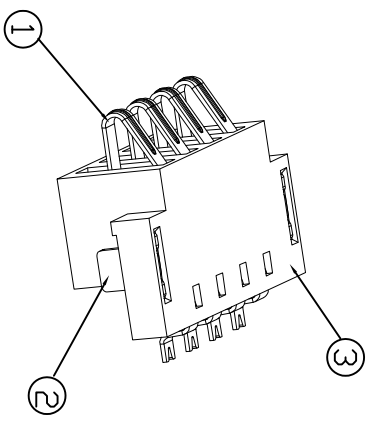
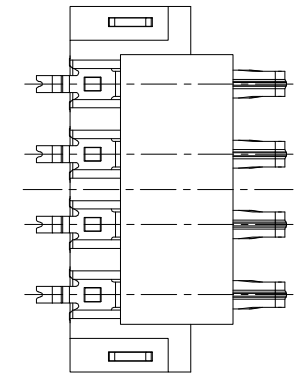
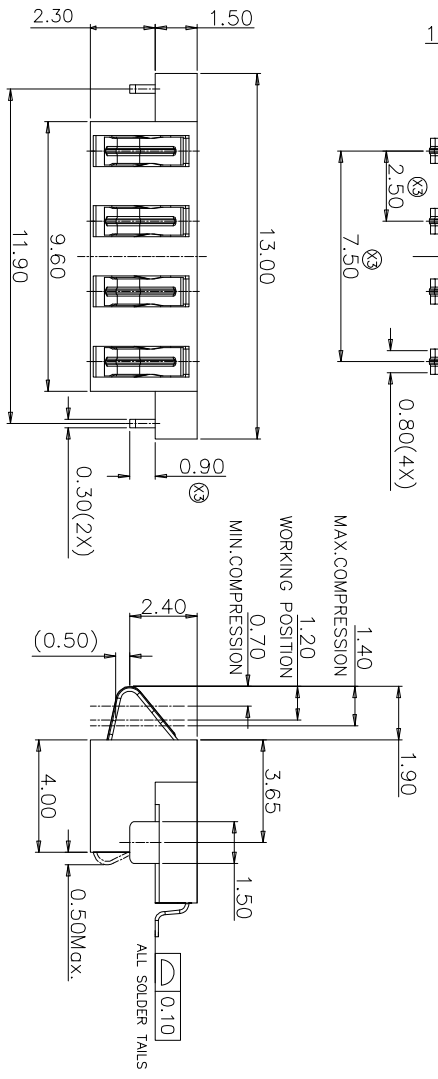


REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31

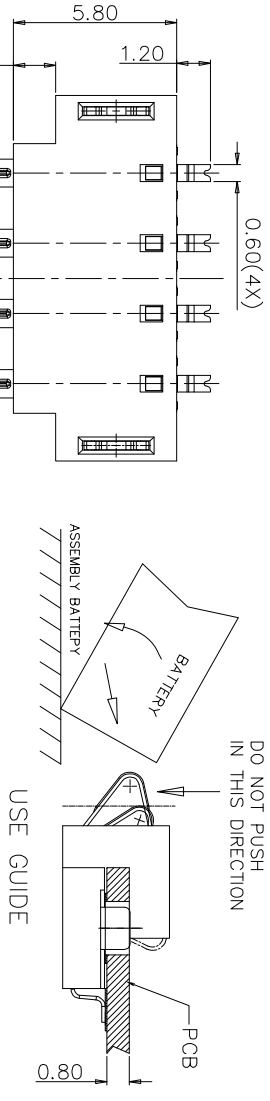

- NOTES:
- ELECTRICAL PERFORMANCES:
 - RATING CURRENT: 2A
 - RATING VOLTAGE: 100VAC
 - CONTACT RESISTANCE: 50 μ m
 - INSULATION RESISTANCE: 1000 Ω M
 - DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MINUTE
 - MECHANICAL PERFORMANCE:
 - DURABILITY: 5000TIMES
 - NORMAL FORCE AT WORKING POSITION: 80gf Min.
 - OPERATION TEMPERATURE: -40° C ~ +85° C.

ITEM	DESCRIPTION	QUANTITY	MATERIAL	FINISH	REMARK
③	PAD 1	2	STAINLESS STEEL	NI PLATING OVER ALL	
②	CONTACT	4	COPPER ALLOY	NI PLATING OVER ALL SOLDER RESISTANCE TOP PLATING OVER TOP PLATING OVER TOP PLATING OVER	
①	HOUSING	1	TERMOPLASTIC ULSAY-0	COLOR:BLACK	

GENERAL TOLERANCE

.0 = ±0.25
.00 = ±0.15
.000 = ±0.05
ANG. = ±3°

NO.	DESCRIPTION OF PLATING ON TERMINALS	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15 μ "
1	GOLD 5 μ "	4	GOLD 20 μ "
2	GOLD 10 μ "	6	GOLD 30 μ "

DWG NO.	JYS1014-03	APPD.	WIND	Scale	1:1
Title	BATTERY 4PIN 2.50PITCH 3.9H	CHKD.		UNIT	mm
Part NO.	JYS-BY380-099	DR:		Date	2011/10/31

杰宇森电子有限公司
 JIE YU SEN ELECTRONIC CO., LTD.

SHEET 1/1